

Sound reduction index in accordance with PN - EN ISO 10140-2:2021-10E

Laboratory measurements of airborne sound insulation of building elements

Client: **NorDan AS**

Measurement date: **29.08.2024**

Address: **Stasjonsveien 46, N-4460 Moi, Norway**

Test specimen: **ND NTech Villa double balcony door – wooden door, 2l system
Inward-opening**

One active and one passive leaf, door leaves with movable post.

The same glazing in both door leaf. Glazing:

10,76 Phon / 24 Ar / 14,76 Phon (GLASSOLUTIONS)

Size of door: **1588 x 2088 x 80 mm** (width x height x door leaf frame thickness)


Test specimen mounted by: **Gryfitlab Sp. z o.o.**

Mass per unit area: **kg/m²**

The surface area of test specimen: **3,43 m²**

Parameter	Receiving room	Source room
Air temp. [°C]	23	22,8
Humidity [%]	61	60
Pressure [hPa]	1015	1015
Volume [m ³]	324	372

Frequency [Hz]	Test results with uncertainty	
	R [dB]	U _{CR} [dB]
50	19,3	4,0
63	27,4	3,2
80	22,8	3,6
100	28,5	2,0
125	27,9	1,9
160	35,8	1,5
200	40,3	1,8
250	42,9	1,3
315	43,2	1,2
400	44,0	1,3
500	46,3	1,2
630	44,7	1,2
800	43,0	1,1
1000	37,4	1,0
1250	36,2	1,0
1600	37,7	1,0
2000	41,7	1,1
2500	43,6	1,0
3150	45,7	1,0
4000	47,5	1,0
5000	47,1	1,1

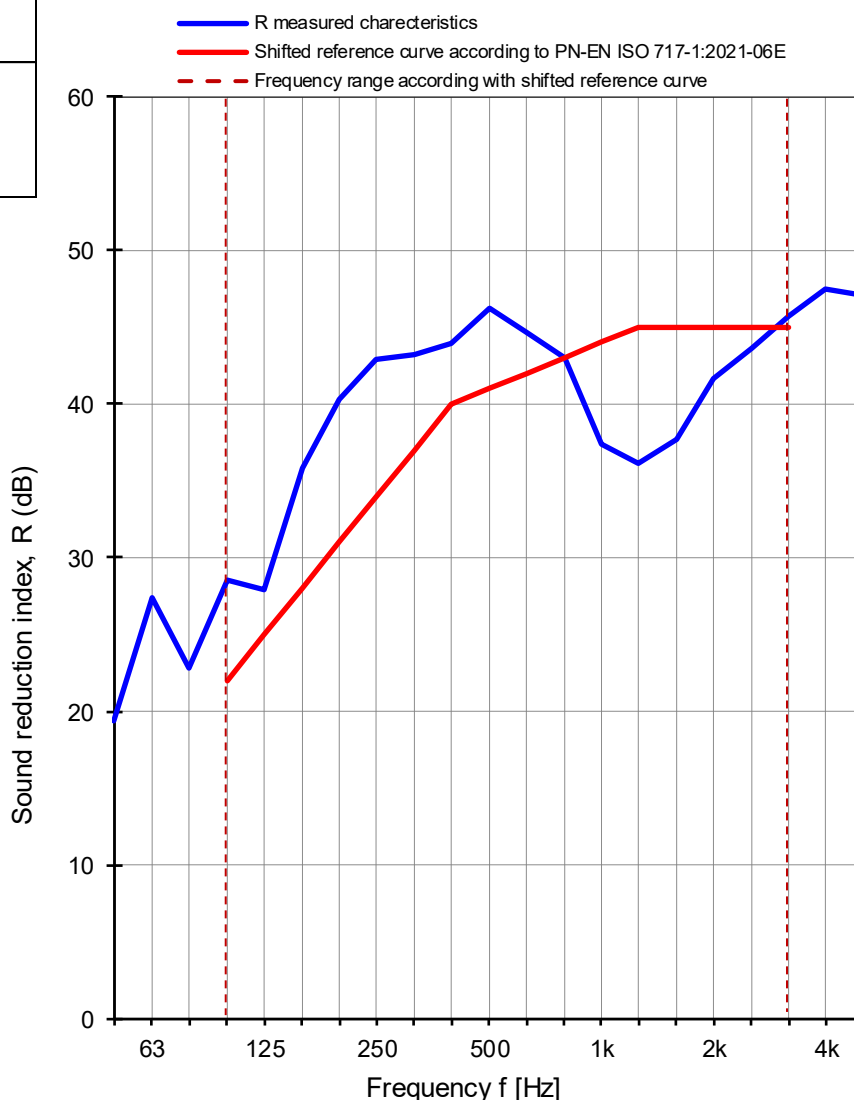

Measurement uncertainty of sound reduction U_{CR}

Confidence level 95% at coverage factor, k=2

Weighted sound reduction index in accordance with PN-EN ISO 717-1:2021-06E

R_w (C; C_{tr}) = 41 (-1; -2) dB

C₅₀₋₃₁₅₀ = -1 dB

C₅₀₋₅₀₀₀ = -1 dB

C₁₀₀₋₅₀₀₀ = 0 dB

C_{tr, 50-3150} = -5 dB

C_{tr, 50-5000} = -5 dB

C_{tr, 100-5000} = -2 dB

GRYFITLAB Sp. z o.o. Laboratory of Acoustics

No. of test specimen: **GLA-1676.15 / 24**

Date of analysis: 29.08.2024

Signature: Robert Dybicz