



Well balanced ironmongery ensures the frame can easily be turned 180 degrees for safe cleaning from the inside of your building. The window has a child safety restrictor integrated in the hinges

With the right options this product can reach following parameters

Burglar resistance

PAS24:2016

Life expectancy

> 60 years

Sound Reduction

> Up to 40 dB Rw + Ctr

U-value





> 0,9 Wm²/K

Technical specification

Glass (double)	6-16G-ES4
Glass (triple)	4ES-16G-4-16G-ES4
Exterior material	Timber / Aluminium clad timber
Interior material	Timber
Child safety	Yes
Escape route	Yes
Ventilation	Yes
Burglar resistance	Yes, Secured by Design accredited
Timber protection	Yes, vacuum impregnated
Ironmongery	Spilka Opus

Product features


Energy saving	U-value: 0.9 to 1.2 W/m ² K
Cleaning	Cleaning from inside
Entry sound reduction	Rw 36dB Rw+Ctr 32dB
Fire resistance	-
Watertightness	Class 9A, EN 12208
Passive availability	No

Measure	 Timber	 Aluclad	 Timber	 Aluclad
Frame width	92 mm	100 mm	105 mm	113 mm
Min Width	488 mm	488 mm	488 mm	488 mm
Max Width	2 300 mm	2 300 mm	2 300 mm	2 300 mm
Min Height	550 mm	550 mm	550 mm	550 mm
Max Height	1 588 mm	1 588 mm	1 588 mm	1 588 mm
Width + Height	Max: 3 300 mm	Max: 3 300 mm	Max: 3 300 mm	Max: 3 300 mm
Sash weight	Max: 55 kg	Max: 55 kg	Max: 55 kg	Max: 55 kg

92 Timber




92 mm

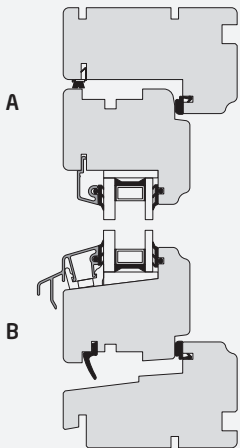

100 Aluclad




100 mm

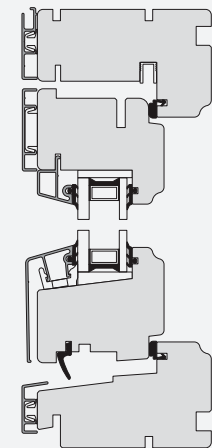

105 Timber




105 mm

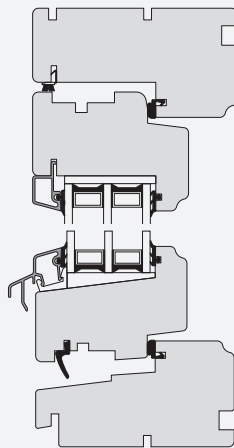


113 Aluclad




113 mm

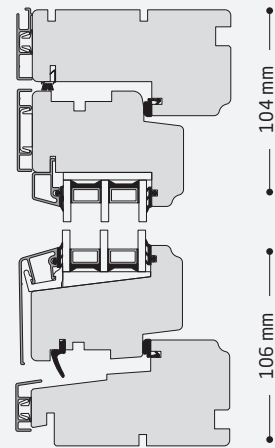


103 mm




103 mm



103 mm



103 mm



104 mm
106 mm